

提夫自控技术（上海）有限公司



Vert-X 28HD - 24V / 0.5 - 4.5V

Sensor principle		MH-C	MH-C2
Electrical data			
Measuring range	°	0...360	-
Indep. linearity	% of meas. range	±0.3	-
Max. hysteresis	°	0.1	-
Resolution	bit	12	-
Max. repeatability	°	0.1	-
Sample rate fast mode	kHz	(5)	-
Sample rate slow mode	kHz	1.66	-
System propagation delay fast mode	µs	(800)	-
System propagation delay slow mode	µs	4600	-
Max. temperature coefficient of the output signal	ppm/°K	100	-
MTTFd / MTBF	years	240/240	-
Power supply voltage	VDC	8...35	-
Current consumption without load (typ.) fast mode	mA	(19)	-
Current consumption without load (typ.) slow mode	mA	14	-
Min. ohmic load at output	kOhm	10	-
Max. capacitive load at output	nF	100	-
Reverse polarity protection of power supply		yes	-
Electrical connection		Cable 3pole	-
Cross section of single wires	mm²	0.56 (AWG20)	-
Redundancy feasible		no	-
Electrical connection redundant		-	-
Cross section of single wires redundant	mm²	-	-
Mechanical data			
Mechanical range	°	360 (continuous)	-
Protection class		IP68 & IP69K	-
Max. starting torque at specified protection class	Ncm	6	-
Max. rotating speed	rpm	3000	-
Min. life	movements	360 Mio.	-
Max. permitted axial shaft load	N	100	-
Max. permitted radial shaft load	N	100	-
Operating & storage temperature	°C	-40 ... +85	-
IEC 68-2-6 Vibration (Amax = 0.75mm, f = 5...2000 Hz)	g	20	-
IEC 68-2-27 Shock	g	50	-
Standards			
EN 55022 class B, Emission radiated (30...230 MHz)	dB(µV/m)	max. 30	-
EN 55022 class B, Emission radiated (230...1000MHz)	dB(µV/m)	max. 37	-
EN 61000-4-2, ESD (contact discharge / air discharge)	kV	±4 / ±8	-
EN 61000-4-3, Immision HF radiated (80...1000 MHz)	V/m	100	-
EN 61000-4-3, Immision HF radiated (1.4...2GHz)	V/m	3	-
EN 61000-4-3, Immision HF radiated (2...2.7GHz)	V/m	1	-
EN 61000-4-4, Burst (on all lines)	kV	±1	-
EN 61000-4-5, Surge (lines to ground)	kV	±1	-
EN 61000-4-6, Immision HF conducted (0.15...80MHz)	Vemk	10	-
EN 61000-4-8, Immision magnetic field (50Hz)	A/m	300	-
IEC 60393-1 Insulation resistance (500VDC, 1bar, 2s)	GOhm	20	-
IEC 60393-1 Dielectric strength (VAC, 50Hz, 1min, 1bar)	kV	1	-

Applications

- Harvester
- Public transport
- Construction machines

Features

- Very high protection class IP68 & IP69K
- Very robust design
- Compact dimensions
- Contactless measuring method
- Long life
- High accuracy of measurement
- Simple adjustment with elongated holes
- Applications under harsh ambient conditions possible (humidity, dampness, dust, dirt, vibrations, etc.)
- Full resolution and accuracy at programmed electrical angle

Errors and omissions excepted. Subject to change without notice. State: 02.11.12

A company of the Siedle-Group

CONTELEC

提夫自控技术（上海）有限公司



Vert-X 28HD - 24V / 0.5 - 4.5V
Ordering code

Vert-X																															
	2	8	H	D	7	3	6	6	4	1	1	0	2																		
Output characteristics<table><tr><td>Positive gradient CW</td><td>Standard</td><td>1</td></tr><tr><td>Positive gradient CCW</td><td>Optional</td><td>2</td></tr></table> Output signal<table><tr><td>0,5VDC...4,5VDC</td><td>Standard</td><td>4</td></tr></table> Power supply voltage<table><tr><td>24VDC</td><td>Standard</td><td>6</td></tr></table>														Positive gradient CW	Standard	1	Positive gradient CCW	Optional	2	0,5VDC...4,5VDC	Standard	4	24VDC	Standard	6						
Positive gradient CW	Standard	1																													
Positive gradient CCW	Optional	2																													
0,5VDC...4,5VDC	Standard	4																													
24VDC	Standard	6																													
Electrical connection<table><tr><td>1</td><td>Standard</td><td>Round cable 3pole</td></tr><tr><td>9</td><td>Optional</td><td>Special cable</td></tr></table> Length of cable<table><tr><td>02</td><td>Standard</td><td>1.0m</td></tr><tr><td>06</td><td>Optional</td><td>3.0m</td></tr><tr><td>10</td><td>Optional</td><td>5.0m</td></tr><tr><td>99</td><td>Optional</td><td>Special length</td></tr></table>														1	Standard	Round cable 3pole	9	Optional	Special cable	02	Standard	1.0m	06	Optional	3.0m	10	Optional	5.0m	99	Optional	Special length
1	Standard	Round cable 3pole																													
9	Optional	Special cable																													
02	Standard	1.0m																													
06	Optional	3.0m																													
10	Optional	5.0m																													
99	Optional	Special length																													
Electrical angle<table><tr><td>36</td><td>Standard</td><td rowspan="3">Electrical angle 360° 03 to 35; Declaration in 10° steps Special angle</td></tr><tr><td>xx</td><td>Optional</td></tr><tr><td>99</td><td>Optional</td></tr></table> Sensor principle<table><tr><td>7</td><td>MH-C</td></tr></table>														36	Standard	Electrical angle 360° 03 to 35; Declaration in 10° steps Special angle	xx	Optional	99	Optional	7	MH-C									
36	Standard	Electrical angle 360° 03 to 35; Declaration in 10° steps Special angle																													
xx	Optional																														
99	Optional																														
7	MH-C																														
Mechanical version<table><tr><td>28HD</td><td>Standard</td><td>6mm shaft D-shape; IP68 & IP69K - Heavy-duty</td></tr><tr><td>28H9</td><td>Optional</td><td>Special shaft</td></tr></table>														28HD	Standard	6mm shaft D-shape; IP68 & IP69K - Heavy-duty	28H9	Optional	Special shaft												
28HD	Standard	6mm shaft D-shape; IP68 & IP69K - Heavy-duty																													
28H9	Optional	Special shaft																													

	MH-C	MH-C2
Custom shaft design	X	-
Custom cable	X	-
Sample rate in fast mode	X	-
Special characteristic curve	-	-
Special electrical angle within 30° to 360° (ex factory)	X	-

Options (on request)

Errors and omissions excepted. Subject to
change without notice. State: 02.11.12

A company of the Siedle-Group


CONTELEC



Vert-X 28HD

Accessories (incl.)

- None

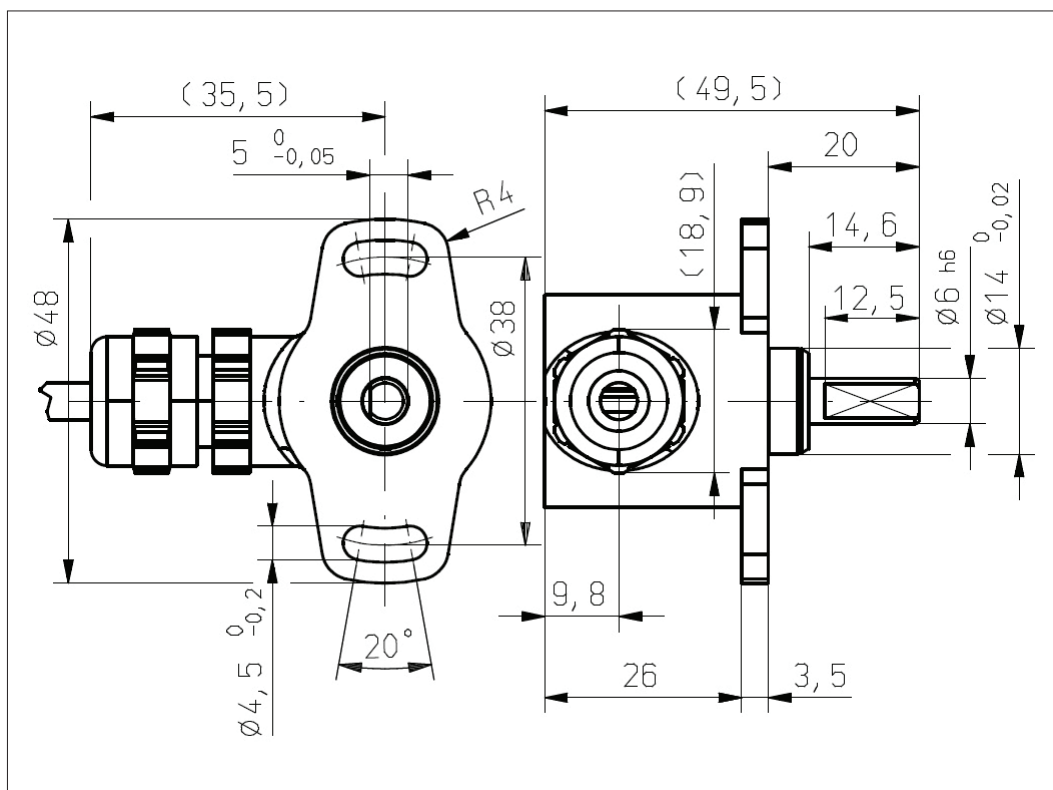

Errors and omissions excepted. Subject to change without notice. State: 02.11.12

A company of the Siedle-Group

CONTELEC